


TREATMENT INSTRUCTIONS FOR RACKS

STORAGE INSTRUCTION

- Range of temperature: +5 to +50 °C
- Protect against heat, direct sunlight, rain and humidity



- No tilting or rough handling of the single rack parts - packed or unpacked

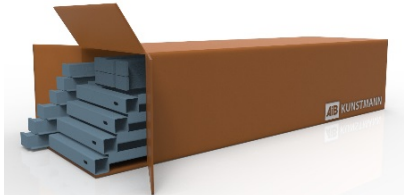

HANDLING INSTRUCTION

- Racks has to be placed on plain surface and upright position
- Damages of the racks has to be repaired proper according instruction



TREATMENT INSTRUCTIONS FOR RACKS

- Check that all screws are tight
- Avoid direct and permanent ultraviolet rays from sunlight or neon light.
- During the assembly no use of grease on the profiles or grids. Only vaseline is possible.
- Clean the racks only with a damp cloth. No use of cleaning agents or silicone spray.



- Cabels, layed at the stand has to be protective isolated according EN 50272-2.

ADVICE: According to this commentary pay attention during assembling to following list:

- Avoid under all circumstances the damaging of the coating during transport and assembly.
- For tiered stands/racks use PE plugs M8 to cover all screws and nuts M8.
- The stand/rack must be assembled with insulators.
- Cabels, laid at the stand must be isolated according to EN 50272-2.

APPLIED STANDARDS: EN 50272-2 : 12-2001 and EN 60664

COMMENTARY: According to EN 50272-2 : 12-2001 para 5.2 epoxy coated racks made from metal have to be connected to the ground (or earth) connector. The construction of the AiB Kunstmann racks provided fulfils the demands of EN 60664.

Pay attention to the enclosed drawings regarding assembling of stands, mounting of diagonals and the commitment regarding EN 50272.

In case of questions or missing parts, please contact your supplier.

<http://www.aib-kunstmann.de/de/kontakt>